


GKB Drainmaster



Do you have a sports pitch or golf course where surface water is causing an issue? Does your pitch stay wet for too long, due to which you do not achieve the desirable playing hours? Are you not in the possession of the time and budget for a complete renovation? With the Drainmaster we can provide you the ultimate machine to tackle these problems.

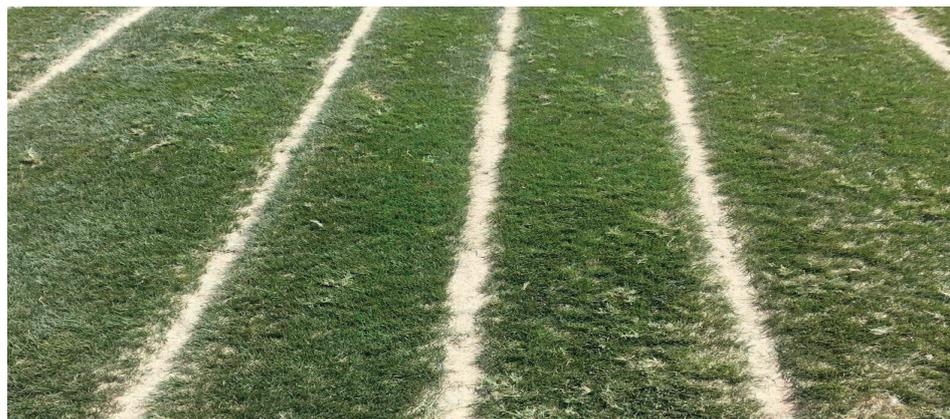

The GKB Drainmaster has been in continuous development since 1985. Throughout the years, the concept of the Drainmaster has constantly been refined. The Drainmaster was developed in order to improve and accelerate the drainage of surface water. Thereupon, the stability and quality of your grass will improve.


Together with the Drainmaster you will improve the current drainage system. The Drainmaster digs two or three trenches of 4 cm width which are positioned perpendicular on the existing underlying drainage. The removed soil will immediately be disposed by means of conveyer belts. Nevertheless, you can also reuse the removed soil as dressing soil. Subsequently, this will save costs and you are assured that you won't apply contaminated soil on your pitch.

THE WORKER IS KING



GKB

THE WORKER IS KING

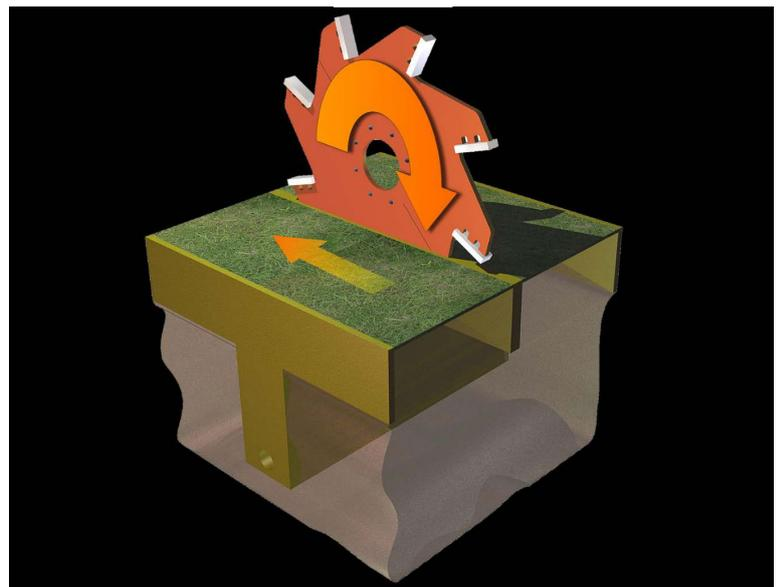

The Drainmaster is also available in a model with a working width of 85 cm. It creates two trenches instead of the three trenches that the DM150 creates. In addition, you can operate the DM850 with a tractor with at least 90 hp.

The bunker is dimensioned in such a way that you are able to rework the entire length of the pitch in just one operating run. Additionally, you can rework the entire width of the pitch twice in just one operating run.



The trenches are filled with drainage sand to the operating depth of 23 cm during the same operation. The wheels of the Drainmaster will press the drainage sand into the trenches. The created drainage network ensures a higher playing capacity. Because of the strengthened grass, you will also experience less damage from the activities on the grass.

If you combine the operations of our Drainmaster and Combinator you can create an even, well-functioning sports pitch, that is not cut short due to water nuisance.




Drainmaster

Specifications:

| Type | DM850 | DM150 |
|---|---|--|
| Working width | 85 cm / 34" | 150 cm / 59" |
| Working depth | 0 - 23 cm / 0 - 9" | 0 - 23 cm / 0 - 9" |
| Dimensions operation (l x w x h) | 450 x 225 x 260 cm / 177 x 89 x 102" | 450 x 260 x 260 cm / 177 x 102 x 102" |
| Weight unladen | 2400 kg / 5295 lbs | 3300 kg / 7280 lbs |
| Bunker capacity | 2,5 m ³ | 4,0 m ³ |
| Power requirement | > 90 hp + creeper gear | > 120 hp + creeper gear |
| Linkage | Drawbar eye | Drawbar eye |

The following specifications are applicable to every Drainmaster model:

| | |
|-------------------|---|
| Hydraulics | 1x double acting hydraulic valve depth adjustment articulating drawbar |
| Hydraulics | 2x double acting hydraulic valve cilinder incline conveyor belt and wheel set |



THE WORKER IS KING